

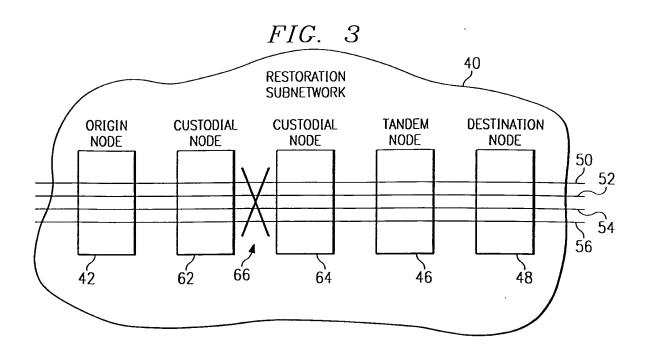



### Alcatel-1100 - 6 2 of 18 21

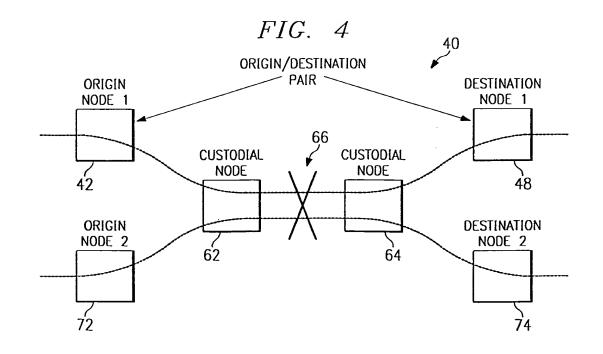

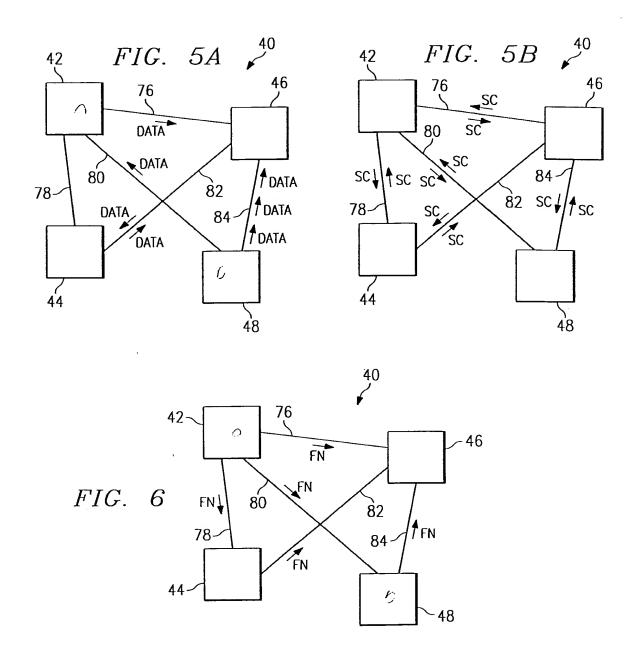

### Alcatel-1100-6 3 of 18 21



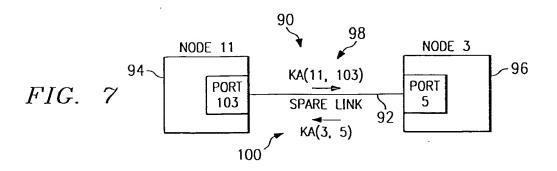

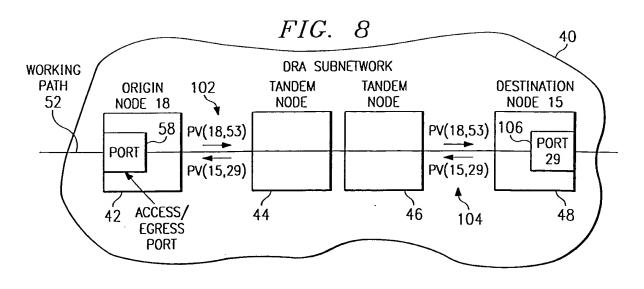


FIG. 9



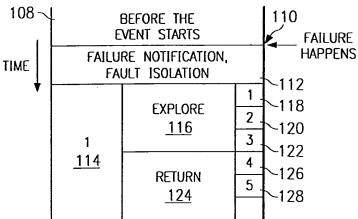



FIG. 13

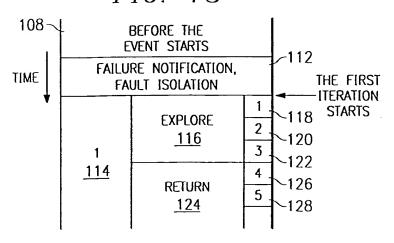



Alcatel-1100 - 6 5 of 18 21

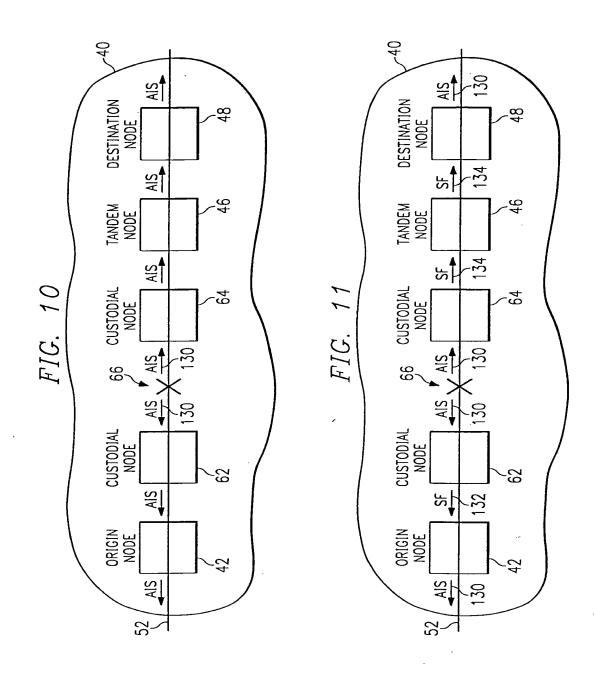



### Alcatel-1100-6 6 of 18 21

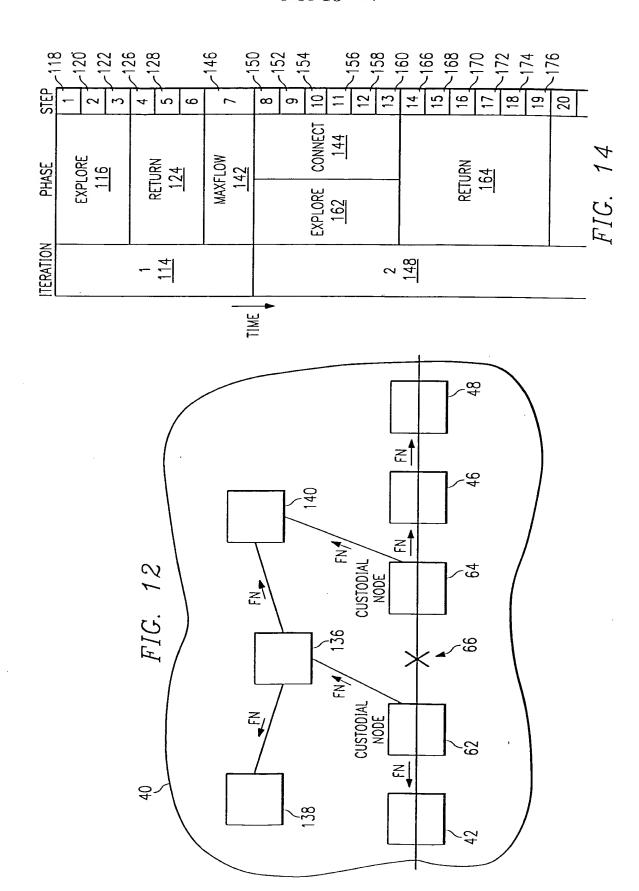


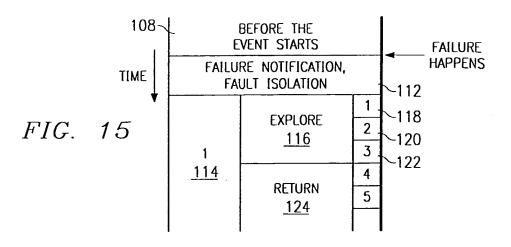

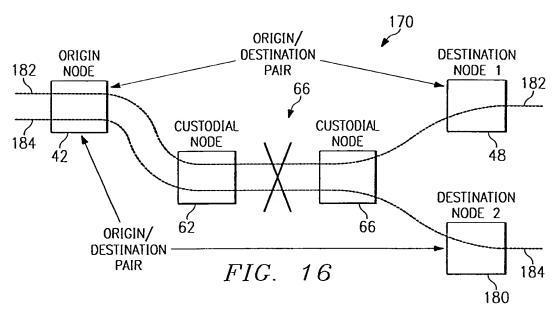


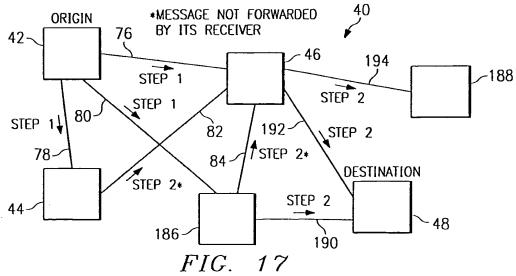

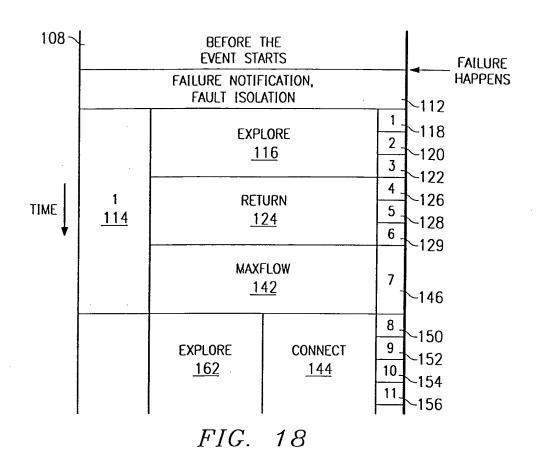

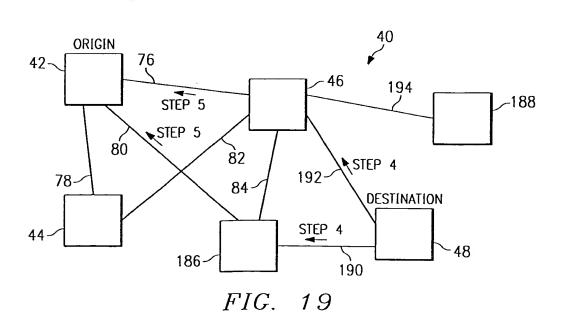

#### Alcatel-1100-6 9 of 18 21

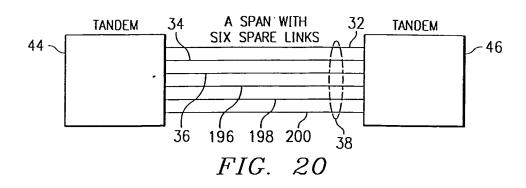

#### PREVIOUSLY



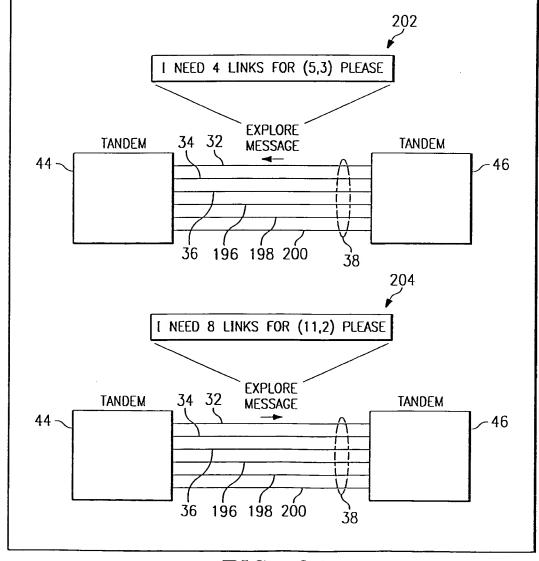



FIG. 21


#### Alcatel-1100 - 6 10 of 18 21

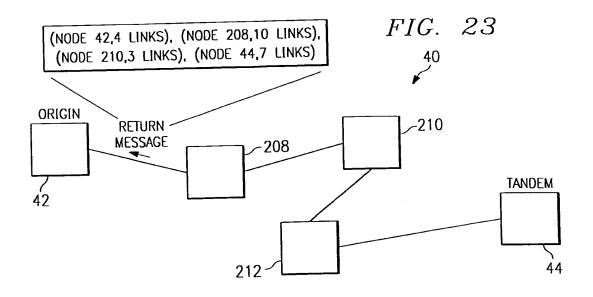


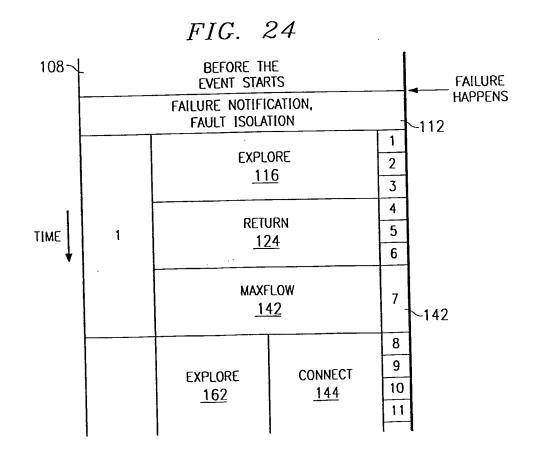

## Alcatel-1100-6 11 of 18 21

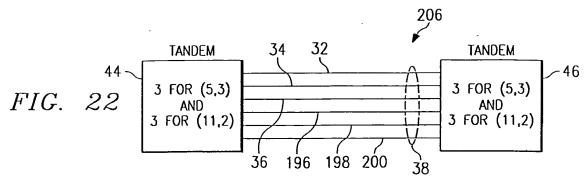

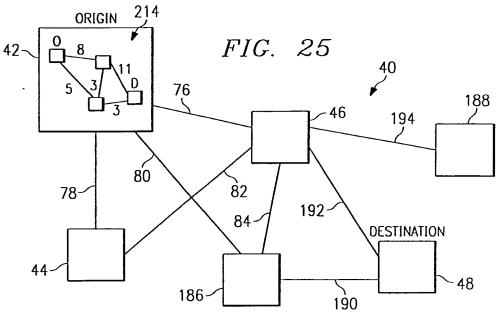

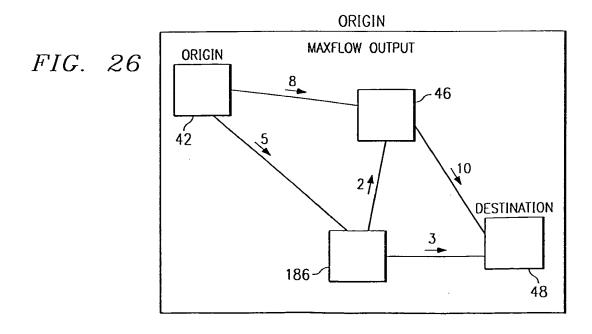

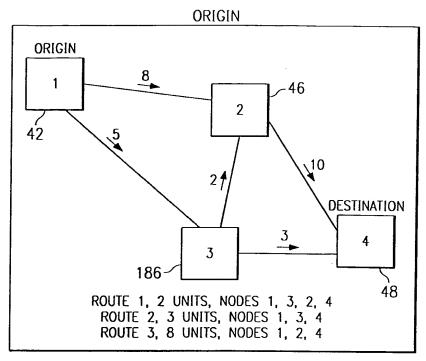


FIG. 27





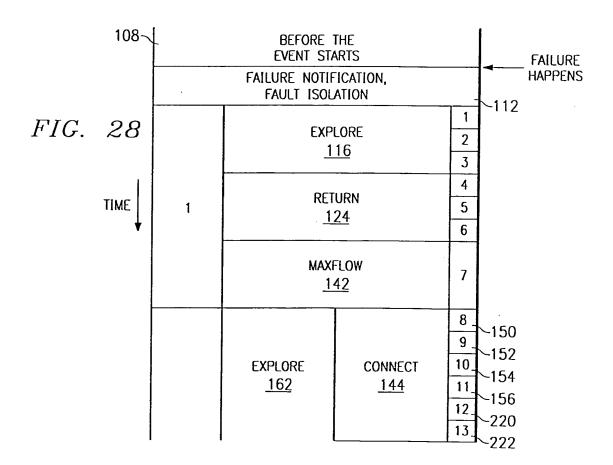



FIG. 29

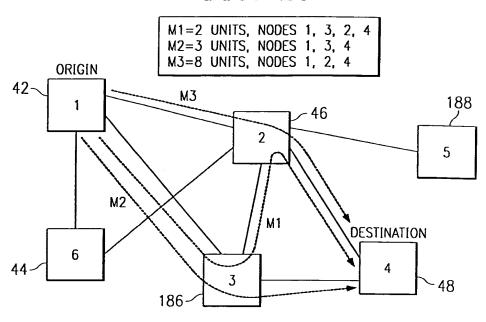


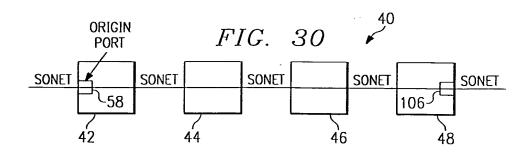


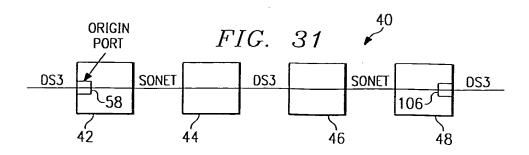


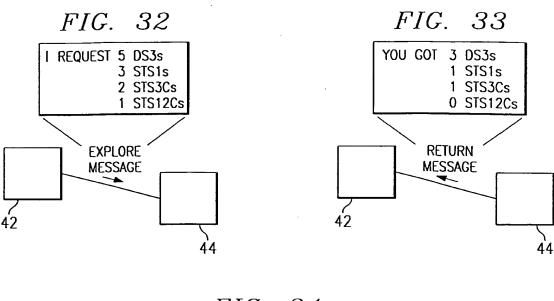




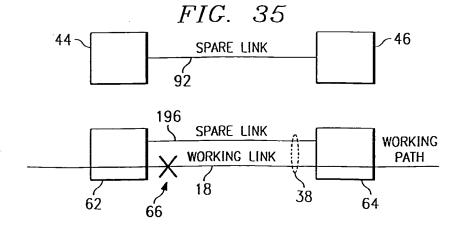


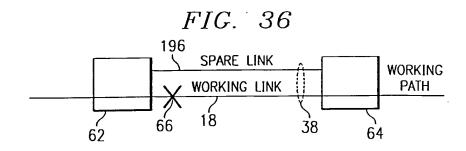


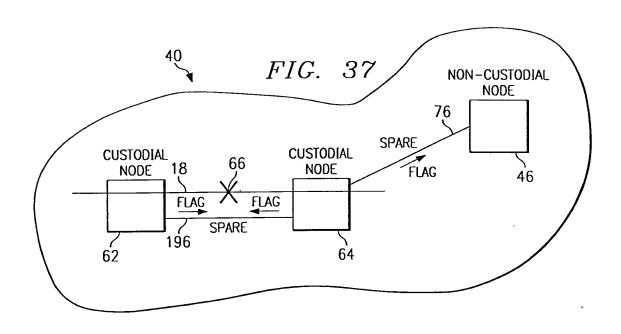


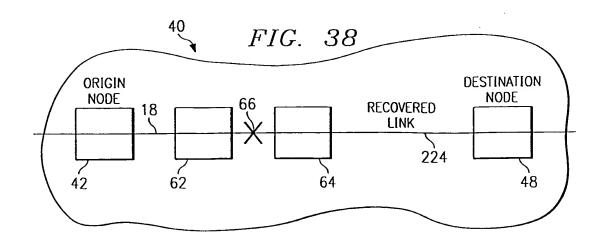

Alcatel-1100 - 6

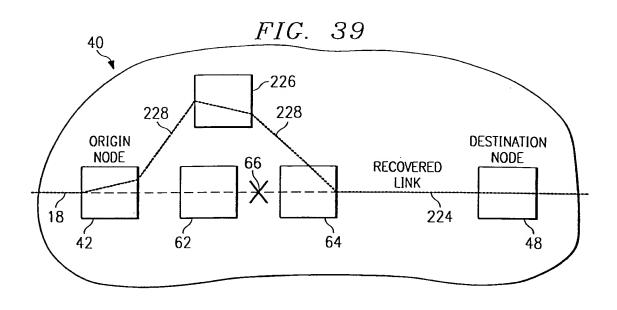

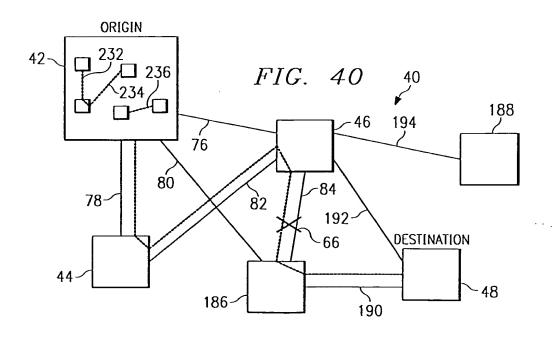

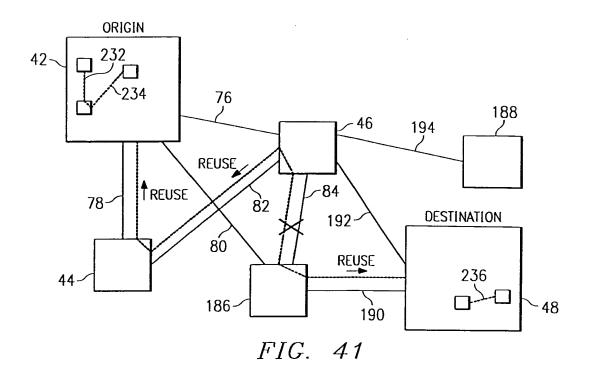

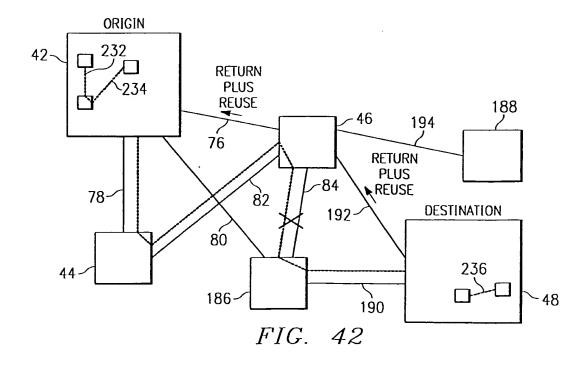


FIG. 43

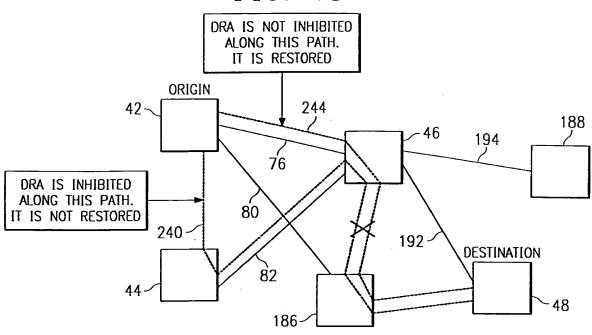
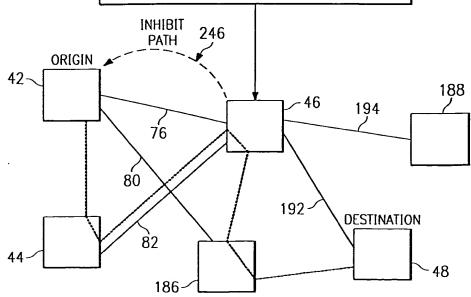


FIG. 44

THIS NODE RECEIVES A TL1 COMMAND TELLING
IT TO TEMPORARILY INHIBIT DRA RESTORATION
ON A PORT. IT SENDS A MESSAGE TO THE
ORIGIN NODE FOR THAT PATH VIA THE WAN




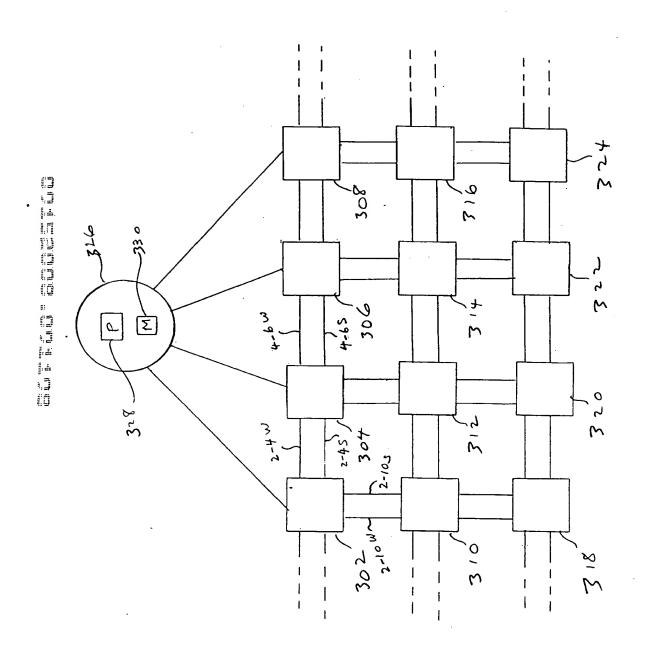


Fig F



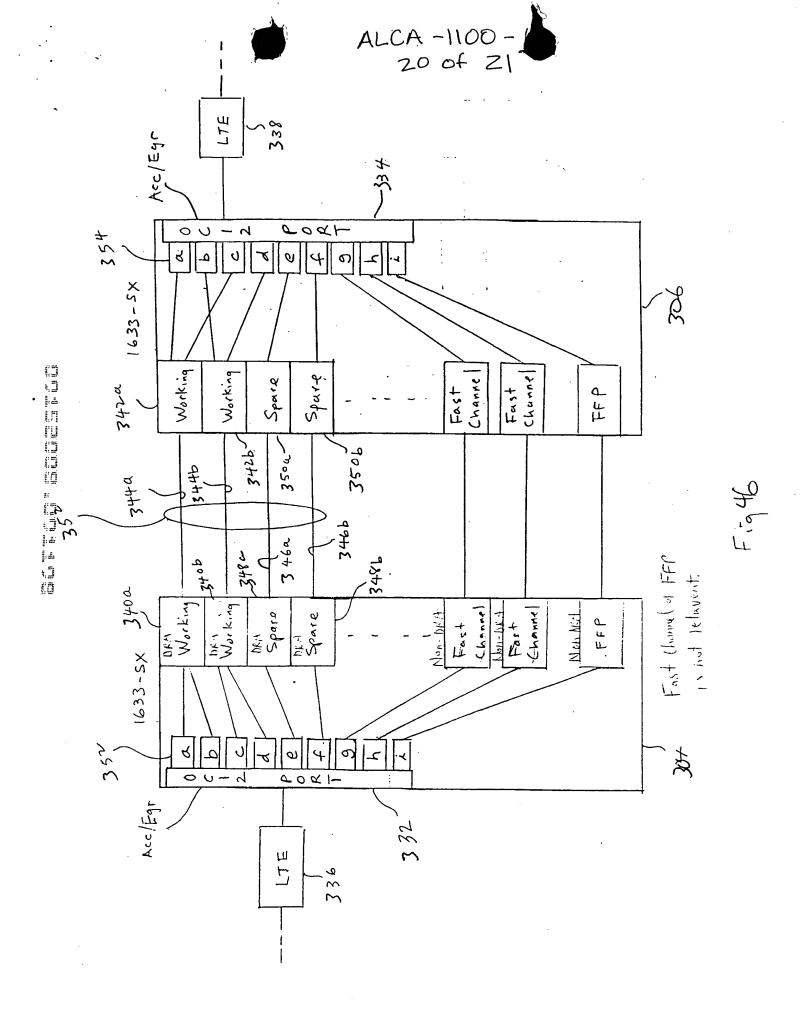

ALCA - 1100 - 6 20 of 21

7 bits		Reserved		Future		_	1
	1 DIC	Iam	ز	Custodia	_	_	& 9
22 1.32	22 0103	Outgoing IP	Addrace	ייייייייייייייייייייייייייייייייייייייי	<u> </u>	<u></u>	99
32 hire	ı	Lacoming	IP Address		_	<u> </u>	ナの
16 bits	5	For	Number		<u></u>	一、	لم و
8 bits	Mar. Th	Mode ID			_	,	<i>ه</i>
8 bits	Software	Description	Kevision			_	ν ∞
8 bits	Messave	4	4700		`	2/5	9

F. 9 47